



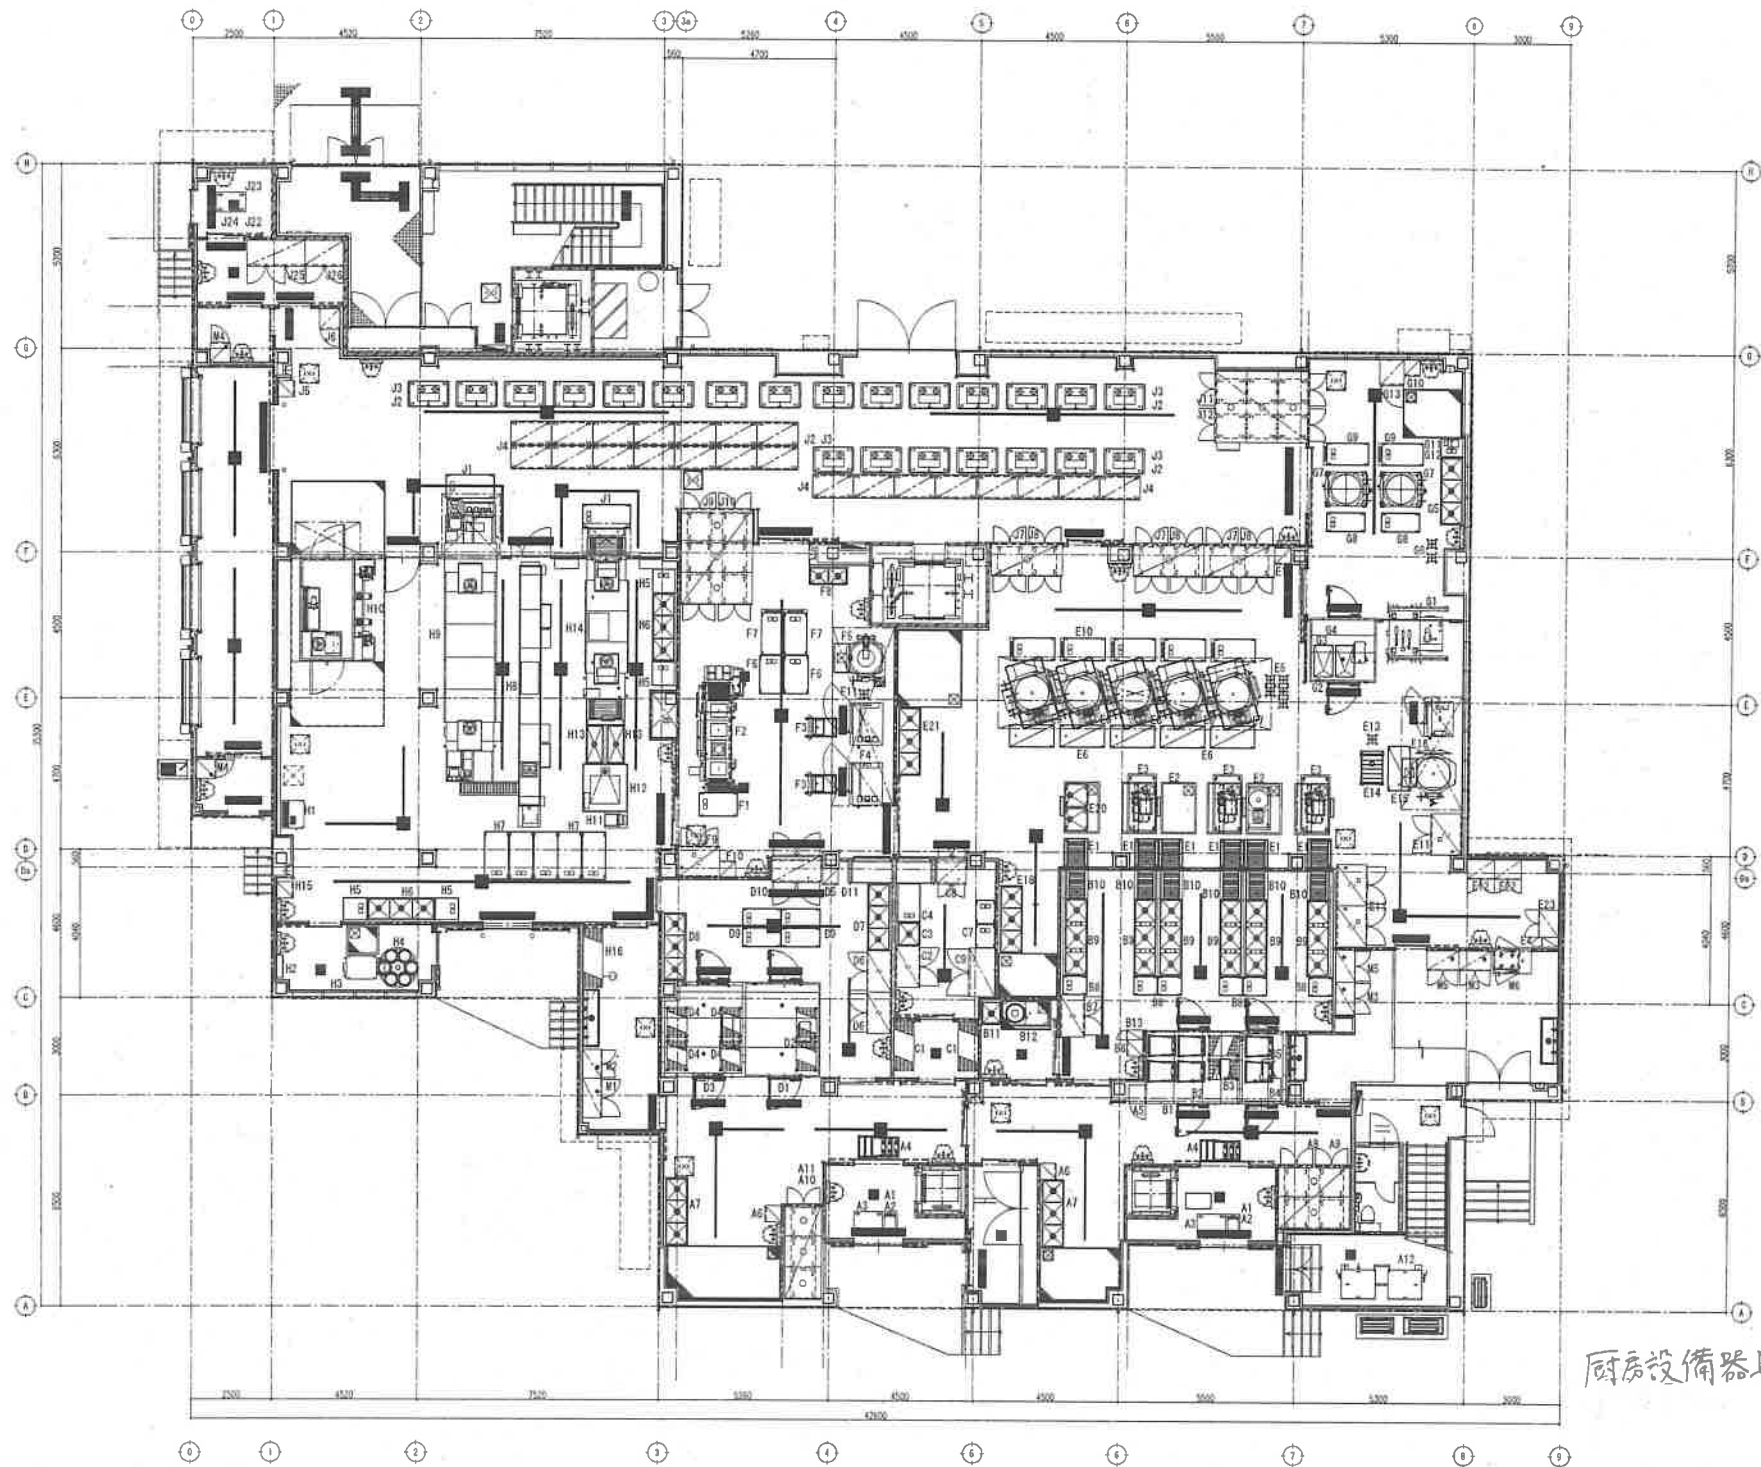

厨房設備器具平面圖(1階)

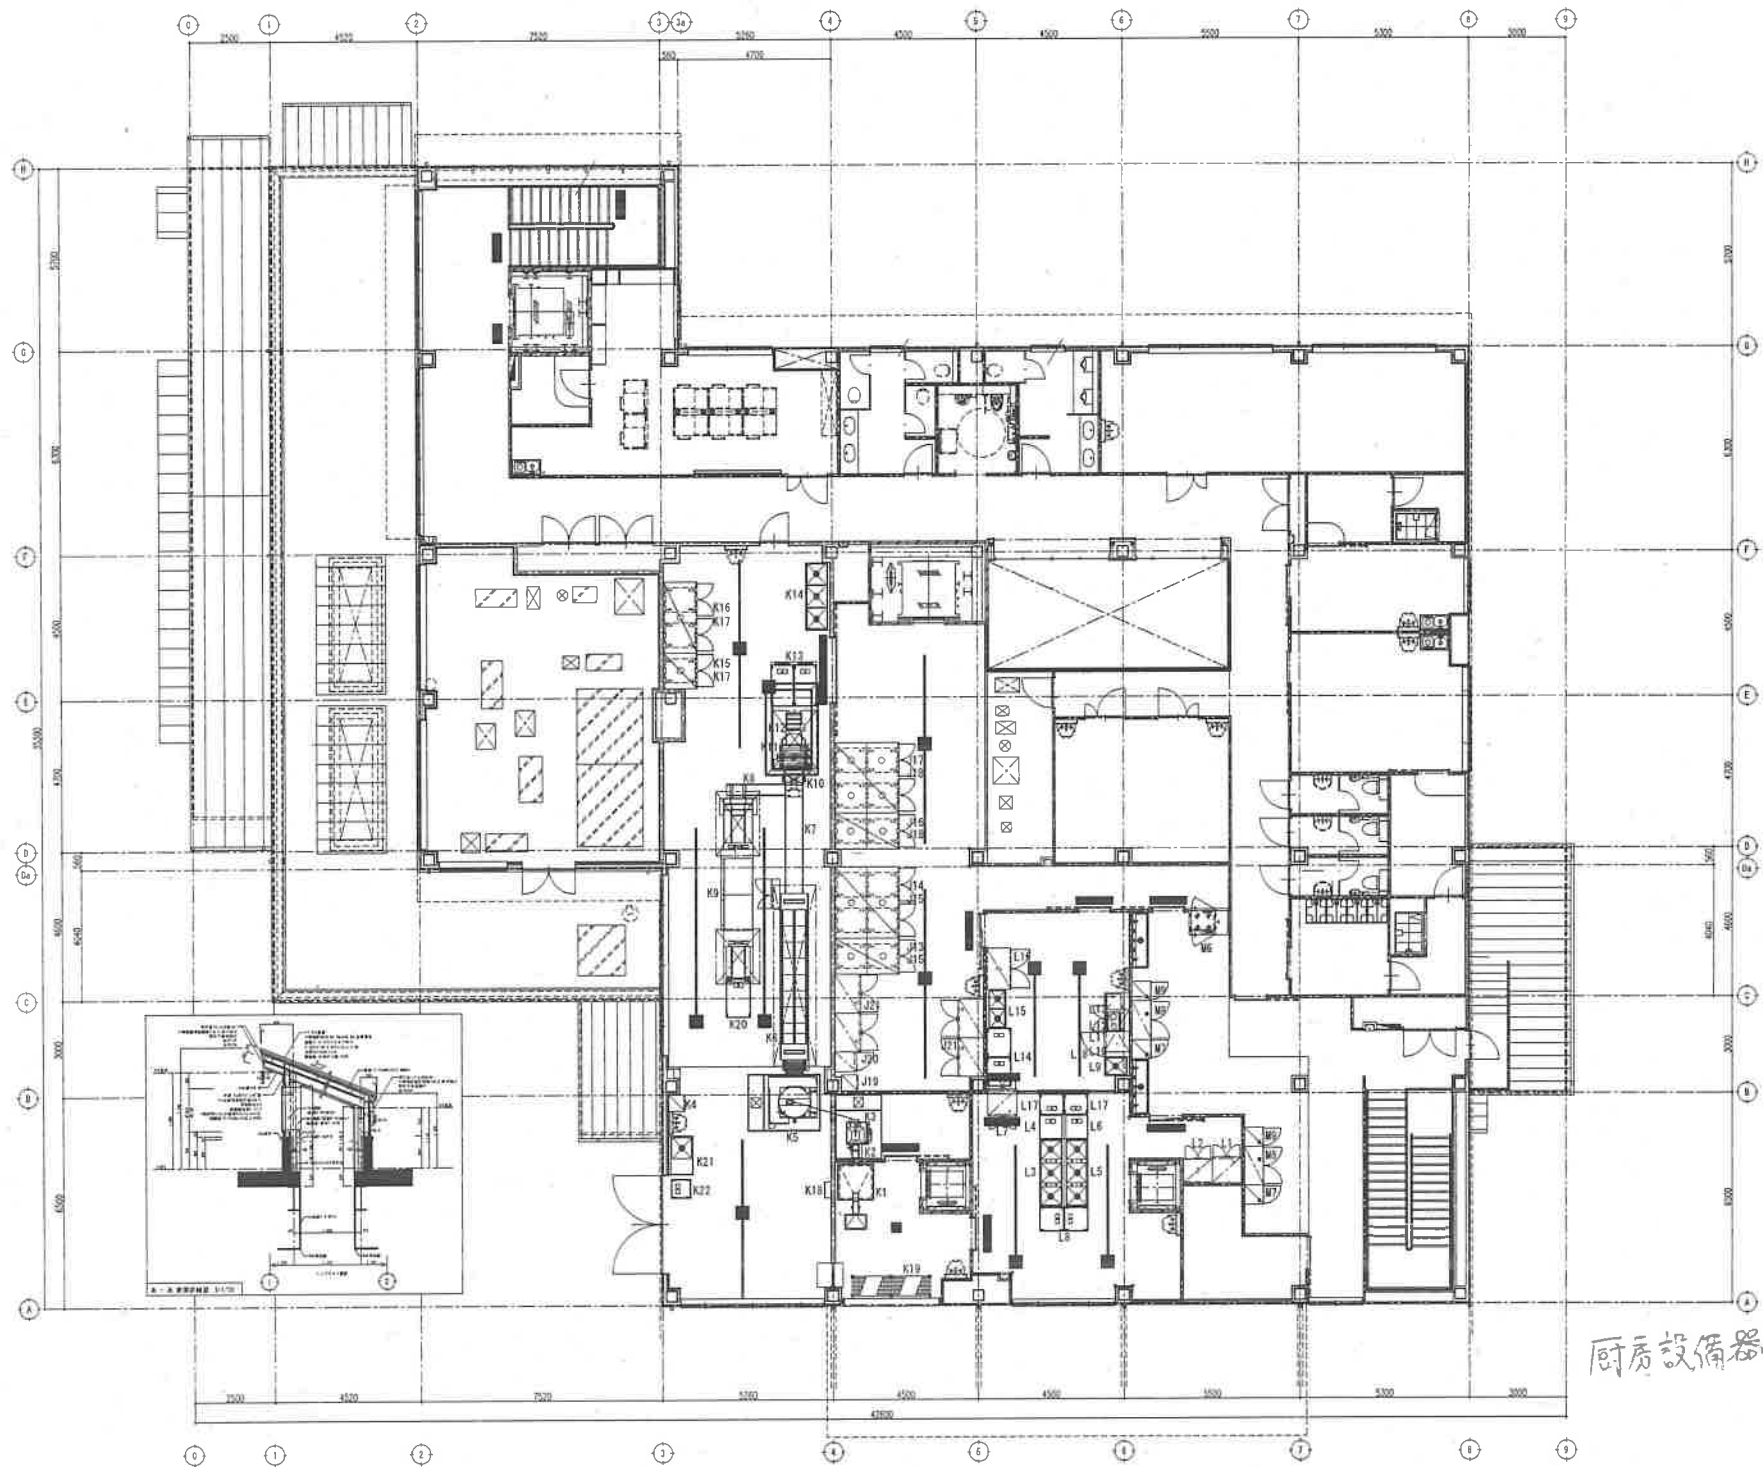

廚房設備器具平面圖(2階)

厨房設備器具明細表

No	品名	型式	規 格 寸 法			台数	配管接続口径(A)			ガス (13A)		電 気 (60Hz) kW			蒸 気		冷 却 水		仕 込・特 記 事 項
			W	D	H		給水	給湯	排水	口径	kW	100V	200V	200V	供給	戻り	kg/h	供給	
〈A:高圧ノボリ室〉																			
1	デジタル表示	DP-6701K-150	350	605	795	2													質量:150kg
2	秤台		700	450	500	2													移動式
3	移動台		900	600	600	2													
4	コンパクト収納カート	VGC-87	875	700	800	6													
5	移動用スリッパ	SF-200T	549	560	1636	1					0.13								容量:198L
6	移動用スリッパ		500	500	1800	2													
7	三層シンク	SDS3-217B	2100	750	850	2	15x3	15x3	40x3										フライパン
8	フックイン器具収納設備	SCT-WZCW-E	2200	2000	2220	1							27.0						片側、両側対応
9	保管用カート		750	900	1720	4													
10	フックイン器具収納設備	SCT-31CW-E	1110	2965	2220	1							29.25						片側、両側対応
11	保管用カート		750	900	1720	3													
12	湯タンク	ATA-1050	2800	1050	2150	1							0.75						貯金型

※コード表記 H:グリッドフィルター無し G:グリッドフィルター有り S:天井換気扇 D:ダクト直結

注:上記接続口径並びに消費量は、各器具に記される1値を示す

廚房設備器具明細表

No	品名	型式	規格寸法			台数	配管接続口径(A)			ガス(13A)			電気(60Hz) kW			重量			冷却水			仕様・特記事項
			W	D	H		給水	給湯	排水	口径	KW	RH100V	RH200V	EH300V	鉄給	戻り	kg/h	鉄給	戻り	l/min		
4	排熱ファン	LS910-15	910	613	1717	4															ファスタード	
5	排熱用吸入		500	500	1800	1																
6	器具用自動弁	JSCK-13JW-EF	1280	750	1880	2							6.4								排気口設置	
7	三連シンク	SOSJ-217B	2100	750	850	1	15x3	15x3	40x3												パイプ径	
8	三連シンク	SOSJ-217B	2100	750	850	1	15x3	15x3	40x3												パイプ径	
9	移動台	DTM-126	1200	600	850	4															パイプ径	
10	バスルーム浴槽	HR-150CA-ML-4G4G	1500	850	1910	1			標準40x2				0.754								床高：1427L 上下ガラス	
	<E>換気設備</>																					
1	受皿シローフコンベア		900	750	600	5																
2	シンク付移動タイ目切機	CBM-4D-DH-C	1350	750	980	1	15		ブレーンダ				0.4								電力：1200kVA (100V) パイプ径	
3	フードスライヤー（型合付）	WSI-04	1800 1612	900 655	850 850	3	15		ブレーンダ				0.95								主部：310x4400mm	
4	送下式回転駆動機	JSC-1	300	510	1600	1						0.48									送下式 動力源4段 電線敷設	
5	スチラスタンフ	HHS-D1	445	445	622	5															移動式	
6	ゲル凝縮ファン		1400	700	1110	5															パイプ径	
7	高気圧ポンプ	SRB-360SN-CBXL	1701	1520	852	1	20	20	パイプ					G	20	20	700				特殊仕様	
8	高気圧ポンプ	SRB-360SN-CBXC	1766	1520	852	3	20	20	パイプ					G	20	20	700				特殊仕様	
9	高気圧ポンプ	SRB-360SN-CBXR	1766	1250	852	1	20	20	パイプ					G	20	20	700				特殊仕様	
10	配管台		1400	700	600	5															パイプ径、移動式	
11	排水用自動弁	JSC-W30JW-EF	1280	950	1880	3							9.75								フェーム構造、自己診断機能付	
12	プレート脱脂機	NCC-14D	850	600	1650	1						0.55									プレート110段 最大500g 乾燥機能付	
13	スチラスタンフ	HHS-D1	445	445	622	1															移動式	
14	洗濯機	DLKH-97	950	700	885	1															パイプ径	
15	ゲル凝縮ファン		1400	700	1110	1															パイプ径	
16	高気圧ポンプ	SRB-300SN-D	1818	1370	1047	1	20	20	パイプ					G	20	20	700				最大量：320L 断続リバーシブル 型合付	
17	システムコンベクションオープン	NL-120T-E	1070	975	1930	1	20		高気圧ポンプ				33.3	G							1ノズルタイプ 20段 セット付	
18	三連シンク	SOSJ-217B	2100	750	850	1	15x3	15x3	40x3												パイプ径	
19	排熱用吸入		500	500	1800	1																
20	排熱シンク	HWS-77D	750	750	850	2	(15)	(15)														
21	三連シンク	SOSJ-217B	2100	750	850	1	15x3	15x3	40x3												パイプ径	
22	プレート脱脂機	NCC-12D	850	600	1650	1						0.55									プレート16段 最大500g 乾燥機能付 可変運転時	
23	送下式回転駆動機	NCC-13D	850	600	1650	1						0.55									送下16本 動力源10段 1ノズル110本 電線敷設付 1ノズル型（標準）	
	<F>給湯・給湯・直し給湯装置</>																					
1	移動台	DTM-127	1200	750	850	1															パイプ径	
2	送湯自動ファイヤ	NAFC-035ME-CL	3500	1540	2810	1	(15)	(15)	排水管				55.0	D							流量：270L	
3	ローレインシート		740	918	1633	2															16段仕様	
4	システムコンベクションオープン	NL-200T-E	1310	1095	1820	2	20		高気圧ポンプ					G							1ノズルタイプ セット標準	
5	低圧排水ポンプ	DKK-SQJES-DP-F	1610	1210	1160 890	1	15	15	パイプ	20				G							最大量：200L	
6	移動台	DTM-127	1200	750	850	2															パイプ径	
7	配管台		1400	700	600	2															パイプ径、移動式	
8	二連シンク	SOSJ-126B	1200	600	850	1	15x2	15x2	40x2												パイプ径	
9	排水用自動弁	JSC-W30JW-EF	1280	950	1880	1							9.75								フェーム構造、自己診断機能付	
10	排熱用吸入		500	500	1800	1																
11	スチラスタンフ	HHS-D1	445	445	622	1															移動式	

■フード表記 H:ダリスフィルター無し G:ダリスフィルター有り S:芝井機搭載 D:ダクト直結

注:上記接続口徑並びに消費量は、各器具に於ける1台を示す

厨房設備器具明細表

No	品 名	型 式	規 格 寸 法			台 数	配管接続口径 (mm)			ガス (13A)		電 気 (60Hz) kW			高 気			冷 却 水			仕 品・特 記 事 項
			W	D	H		給水	給湯	排水	口径	kW	※100V	※200V	※300V	供給	戻り	kg/h	供給	戻り	l/min	
<G:ガス機器>																					
1	真空冷凍機	CM-150QXW	1950	1770	2439	1	15	25	25				4.6	20	15	700					
2	ガス乾燥冷凍庫		2050	1950	2600	1						0.01	2.3							冷凍機・冷凍庫	
3	ガス乾燥カート		1000	600	1400	2															
4	一次機																				
5	三層シンク	SDS3-217B	2100	750	850	1	15x3	15x3	40x3											フライパン	
6	スライダシステム	HHS-01	445	445	622	2														調理機	
7	ガス乾燥冷凍庫	SRB-200NR-DP(H)	1538	1106	832	2														キャスター付	
8	調理台	DTM-126	1200	600	850	2														フライパン	
9	配給台		1400	700	600	2														フライパン、自動式	
10	調理用入れ		500	500	1800	1															
11	電動圧切機	1000x9	225	450	413	1						0.09									
12	作業台	DT-67B	600	750	850	1			32											フライパン	
13	洗浄乾燥機	HF-75LA3-CS(H)	750	800	1910	1			40				1.398							482L、スライダシステム乾燥機	
<H:ガス機器>																					
1	コンプレッサー	POD-3.7MR6	919	691	1220	1			40				4.35							17-18号機 (乾燥機外工事) 組合せ	
2	真空乾燥システム制御機	GPL-1P	500	200	500	1							17							乾燥機・乾燥機・真空乾燥機 (乾燥機外工事)	
3	乾燥機	YS-1500GDR	1290	720	1500	1	20	20	25x3											17-18号機 (乾燥機外工事) 乾燥機	
4	ドライバック交換機	GDR-6	1250	1250	463	1			40											乾燥機・乾燥機・真空乾燥機 (乾燥機外工事) 乾燥機	
5	作業台	DT-77B	750	750	850	4			32											フライパン	
6	三層シンク	SDS3-217B	2100	750	850	2	20x3	20x3	40x3											フライパン	
7	調理台	DTM-157	1500	750	850	5														フライパン	
8	立体乾燥機	YDS-1BE-81	8100	1000	1850	1	20	20	25				43.6	D						17-18号機 15A	
9	乾燥・スライダ・乾燥機	DWMX4-84SB-14ME	8730	1775	2400	1	20x2	20	25				132.12	D						乾燥・乾燥機・乾燥機・17-18号機 15A×2 乾燥2系統	
10	コンテナ乾燥機	COW-B-M-E	3140	2300	2550	1	20	20	25				94.7	D						乾燥2系統	
11	乾燥システム	Z-7000+HWH-30	500	700	1366	1						0.025									
12	乾燥機内蔵シンク	SDSPF6-1500-156T	1500	1400	850	1	20		40			2.3								17-18号機 40A型 (乾燥機外工事)	
13	一層シンク	SDS1-126B	1200	600	850	2	15	15	40											フライパン	
14	真空乾燥機	DWX3-DMH-ME	6050	1350	2160	1	20x2	25	20				47.3	D							
15	調理用入れ		500	500	1800	1															
16	パン	LS1820-19	1821	613	1892	1															
<J:コンテナ機>																					
1	調理台	DTM-157	1500	750	850	2														フライパン	
2	天板式コンテナ・乾燥機	ISCV-1JW-E	1150	800	1160	22							6.75								
3	乾燥用コンテナ		1270	770	1570	22														真空乾燥機	
4	乾燥用コンテナ		1270	750	1430	22														真空乾燥機	
5	調理用入れ		500	500	1800	1															
6	乾燥用冷凍機	HF-63BT-KS2	625	650	1910	1			40			0.37								冷凍:384L	
7	フックイン乾燥機・乾燥機	SCT-S2CW-E	2200	1035	2220	3							13.5							乾燥・乾燥機・乾燥機	
8	保管用カート		750	900	1720	6															
9	フックイン乾燥機・乾燥機	SCT-S3CW-E	2200	2965	2220	1							40.5							乾燥・乾燥機・乾燥機	
10	保管用カート		750	900	1720	6															
11	フックイン乾燥機・乾燥機	SCTC-S3CW-E	2200	2965	2720	1			40				40.5							乾燥機・乾燥機・乾燥機	
12	保管用カート		750	900	1720	6															

※A:ガス機器、H:ガスフィルター無し、G:ガスフィルター有り、S:天井換気扇、D:ダクト直結

注:上記接続口径及び消費量は、各器具に依り異なる場合があります。

厨房設備器具明細表

No	品 名	型 式	規 格 寸 法			台 数	配管接続口径 (A)			ガス (13A)			電 気 (60Hz) kW			排 気			冷 却 水			仕 様・特 記 事 項
			W	D	H		給 水	給 湯	排 湯	口径	kW	※100V	※200V	≒200V	排 気	戻り	kg/h	供給	戻り	l/min		
13	トファクイン食器洗滌設備	SCT-W1CW-E	1110	2000	2220	1								19.5							片側、縦型洗滌台	
14	トファクイン食器洗滌設備	SCT-W2CW-E	2200	2000	2220	1								27.0							片側、縦型洗滌台	
15	食器洗滌カート		750	900	1720	6																
16	トファクイン予備食器洗滌設備	SCT-W1CW-E	1110	2000	2220	1								19.5							片側、縦型洗滌台	
17	トファクイン予備食器洗滌設備	SCT-W2CW-ED	2200	2000	2220	1								39.0							片側、縦型洗滌台	
18	食器洗滌カート		750	900	1720	6																
19	洗滌用足入れ		500	500	1800	1																
20	鍋煮用冷凍庫	HF-63BT-KS2	625	650	1910	1			縦40		0.37										容量:384L	
21	冷凍庫	HR-120B-ML	1200	800	1910	4			縦40		0.29										容量:1054L	
22	一次室																					
23	二次室																					
24	移動台		900	600	600	1																
25	冷凍庫	HF-180B3-ML	1800	800	1910	1			縦40				0.693								容量:1624L	
26	冷凍庫	HF-120B-ML	1200	800	1910	1			縦40		0.657										容量:1046L	
	<K:氷室/風冷型/暖房型>																					
1	氷室/ロ・パットコンベア					1							0.006	0.2							円形台	
2	分岐機	RM-1	400	350	265	1								0.04								
3	造粒機本体	RW-30A	700	700	800	1	20		ビキ					0.75								
4	洗滌用足入れ		500	500	1800	1																
5	増量配水配管機	RD-300A	1900	1500	3257	1	25		ビキ					0.1							流量:300kg、配管コンベア付	
6	電気加熱配管機	RCE-12T	5903	1142	1790	1								97.9	H						流量能力:210kg/h、2系統	
7	風出しコンベア		3800	560		1															フローベア付	
8	風冷型空冷器コンベア		1800	360		1																
9	炊飯器・湯	RW2-MRE	5680	1160	1680	1	20	20	高圧50×4					65.3	H							
10	炊飯器・湯	RCP-7MS	582	347	86	34																
11	底板ほくし機	RMR-60W	1525	1205	1379	1	15	15	ブルーノフ					0.5							能力:50kg/h	
12	食器洗滌機	SRG-15KBM	1000	573	1093	1			ブルーノフ		0.018										ホースター付	
13	配管台		1400	700	600	2															ワイヤ型、移動式	
14	三連シンク	SDS3-217B	2100	750	850	1	15×3	15×3	40×3												ワイヤ型	
15	トファクイン食器洗滌設備	ISCT-S1CW-E	1110	1035	2220	1								9.75							片側、縦型洗滌台	
16	トファクイン食器洗滌設備	ISCT-S2CW-E	2200	1035	2220	1								13.5							片側、縦型洗滌台	
17	食器洗滌カート		750	900	1720	3																
18	炊飯システム制御機		500	200	800	1															電気配線・配管・ガス配管・排水配管工事	
19	移動フック	LS1220-19	1212	613	2054	2															ホースター付	
20	移動台	DTM-127	1200	750	850	1															ワイヤ型	
21	一連シンク付移動台		1200	750	850	1	15	15	40												ワイヤ型	
22	移動台	DTM-66	600	600	850	1															ワイヤ型	
	<L:食器フレンドー・調理室>																					
1	冷凍庫	HR-90B--ML	900	800	1910	1			縦40		0.286										容量:761L	
2	器具洗滌設備	ICK-12JW-EF	900	750	1880	1								5.2							容量:5.2L	
3	三連シンク	DS3-217B	2100	750	850	1	15×3	15×3	40×3												ワイヤ型	
4	作業台	DT-77B	750	750	850	1			32												ワイヤ型	
5	三連シンク	DS3-217B	2100	750	850	1	15×3	15×3	40×3												ワイヤ型	
6	作業台	DT-77B	750	750	850	1			32												ワイヤ型	
7	ガスシェー冷凍庫	HR-90CA-ML-4C4G	900	850	1910	1			縦40		0.502										容量:812L、上下ダブル	
8	移動台	DTM-77	750	750	850	2															ワイヤ型	

※フック表記 H:ガラスフィルター無し G:ガラスフィルター有り S:天井換気扇 D:ダクト直結

注:上記接続口径並びに消費量は、各器具に依る1台を示す

廚房設備器具明細表

No	品名	型式	外形寸法				台数	配管接続口径(A)				ガス(13A)				電機(60Hz) kW				高圧				冷却水				仕組・特記事項
			W	D	H			給水	給湯	排水	口径	kW	●熱100V	●熱200V	●熱300V	消費電力	流量	kg/h	伏降	戻り	L/min							
9	一器シンク	SOS1-57B	600	750	850	1	15	15	40					1.46										Fライヒダ				
10	ウォーターヌープン	AX-XA30	490	430	420	1																						
11	Jドッキングビーター	KZ-CK2020	600	453	100	1								4.0			存											
12	二穴型-																											
13	低コストファースト冷凍庫	RL-120SNCG-ML-T	1200	600	650	1								0.194									冷蔵：138L					
14	移動台	DTM-97	900	750	850	2																	Fライヒダ					
15	二層シンク	SOS2-126B	1200	600	850	1	15x2	15x2	40x2														Fライヒダ					
16	製氷用冷蔵庫	ICK-13JW-EF	1280	750	1880	1										6.4							冷蔵室5段式扉					
17	移動交換台		650	750	850	2																	Fライヒダ					
18	ラビッドフー	HRC-SB	780	750	850	1								0.401									1ノミタマシン 第250mm 5段収納					
	(片側壁)																											
1	クリーンロッカー	NBO-4E	1200	600	1800	1								1.05									規格：白鉄(エプロン)12~15 増設22 高さ18足					
2	クリーンロッカー	NBO-3E	900	600	1800	1								1.05									規格：白鉄12~15 増設24 高さ12足					
3	クリーンロッカー(暖房専用)	NBO-16E	1000	600	1900	2								1.05									規格：増設 32足					
4	クリーンロッカー	NBO-2E	600	600	1800	2								0.55									規格：白鉄厚板~10 増設16 高さ5足					
5	クリーンロッカー(白衣専用)	NBO-16E	1000	600	1900	2								1.05									規格：白鉄(エプロン)12足					
6	エアゾウ	RD-OEC-SP	1200	800	2000	2									0.75								5段階					
7	クリーンロッカー	NBO-2E	600	600	1800	2								0.55									規格：白鉄厚板~10 増設16 高さ5足					
8	クリーンロッカー(白衣専用)	NBO-4E	1200	600	1800	2								1.065									規格：白鉄(エプロン)15~20足					
9	クリーンロッカー(給食専用)	NBO-2E	600	600	1800	2								0.55									規格：増設 16足					
	...経費用金..										50.0	22.263	4.006	12.004			490.0											

※フード表記 H: グリスフィルター無し G: グリスフィルター有り S: 天井換気扇 D: ダクト直結

注:上記接続口徑並びに消費量は、各器具に於ける1台を示す